

## Flat bar




Flat bar, hot rolled, annealed and pickled, respectively slitted.  
Tol Din1017

Width	Thickness	Length	Weight per m in kg	
15	X	3	4	0,35
20	X	3	4	0,47
25	X	3	4	0,59
30	X	3	4	0,71
40	X	3	4	0,94
50	X	3	4	1,18
15	X	4	4	0,47
20	X	4	4	0,63
25	X	4	4	0,79
30	X	4	4	0,94
40	X	4	4	1,26
50	X	4	4	1,57
60	X	4	4	1,88
15	X	5	4	0,59
20	X	5	4	0,79
25	X	5	4	0,98
30	X	5	4	1,18
35	X	5	4	1,37
40	X	5	4	1,57
50	X	5	4	1,96
60	X	5	4	2,36
70	X	5	4	2,75
80	X	5	4	3,14
90	X	5	4	3,53
100	X	5	4	3,93

Width	Thickness	Length	Weight per m in kg	
20	X	6	4	0,94
25	X	6	4	1,18
30	X	6	4	1,41
35	X	6	4	1,65
40	X	6	4	1,88
50	X	6	4	2,36
60	X	6	4	2,83
70	X	6	4	3,30
75	X	6	4	3,53
80	X	6	4	3,77
90	X	6	4	4,24
100	X	6	4	4,71
12	X	8	4	0,75
20	X	8	4	1,26
25	X	8	4	1,57
30	X	8	4	1,88
35	X	8	4	2,20
40	X	8	4	2,51
50	X	8	4	3,14
60	X	8	4	3,77
70	X	8	4	4,40
75	X	8	4	4,71
80	X	8	4	5,02
100	X	8	4	6,28
120	X	8	4	7,54
150	X	8	4	9,42

Dimensions in mm.

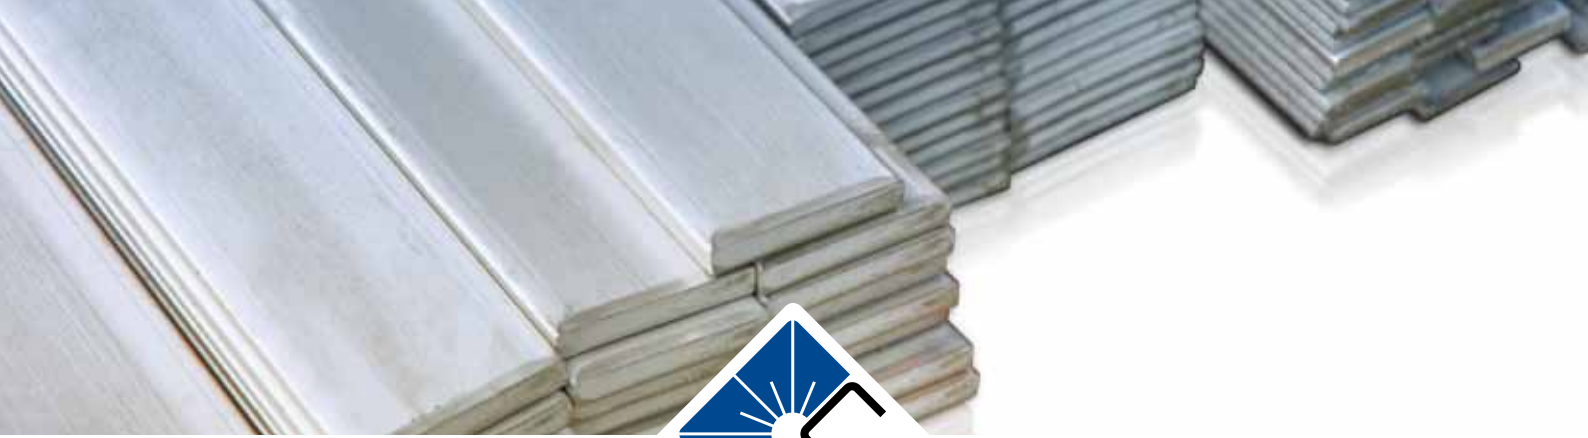

## Flat bar




Flat bar, hot rolled, annealed and pickled, respectively slitted.  
Tol Din1017

Width	Thickness	Length	Weight per m in kg	
15	X	10	4	1,18
20	X	10	4	1,57
25	X	10	4	1,96
30	X	10	4	2,36
35	X	10	4	2,75
40	X	10	4	3,14
50	X	10	4	3,93
60	X	10	4	4,71
70	X	10	4	5,50
80	X	10	4	6,28
90	X	10	4	7,07
100	X	10	4	7,85
110	X	10	4	8,64
120	X	10	4	9,42
130	X	10	4	10,21
140	X	10	4	10,99
150	X	10	4	11,78
200	X	10	4	15,70
25	X	12	4	2,36
30	X	12	4	2,83
35	X	12	4	3,30
40	X	12	4	3,77
50	X	12	4	4,71
60	X	12	4	5,65
70	X	12	4	6,59
75	X	12	4	7,07
80	X	12	4	7,54
100	X	12	4	9,42
120	X	12	4	11,30
150	X	12	4	14,13

Width	Thickness	Length	Weight per m in kg	
20	X	15	4	2,36
25	X	15	4	2,94
30	X	15	4	3,53
35	X	15	4	4,12
40	X	15	4	4,71
50	X	15	4	5,89
60	X	15	4	7,07
70	X	15	4	8,24
75	X	15	4	8,83
80	X	15	4	9,42
90	X	15	4	106,00
100	X	15	4	11,78
120	X	15	4	14,13
150	X	15	4	17,66
25	X	20	4	3,93
30	X	20	4	4,71
35	X	20	4	5,50
40	X	20	4	6,28
45	X	20	4	7,07
50	X	20	4	7,85
60	X	20	4	9,42
70	X	20	4	10,99
80	X	20	4	12,56
100	X	20	4	15,70
150	X	20	4	23,55

Dimensions in mm.

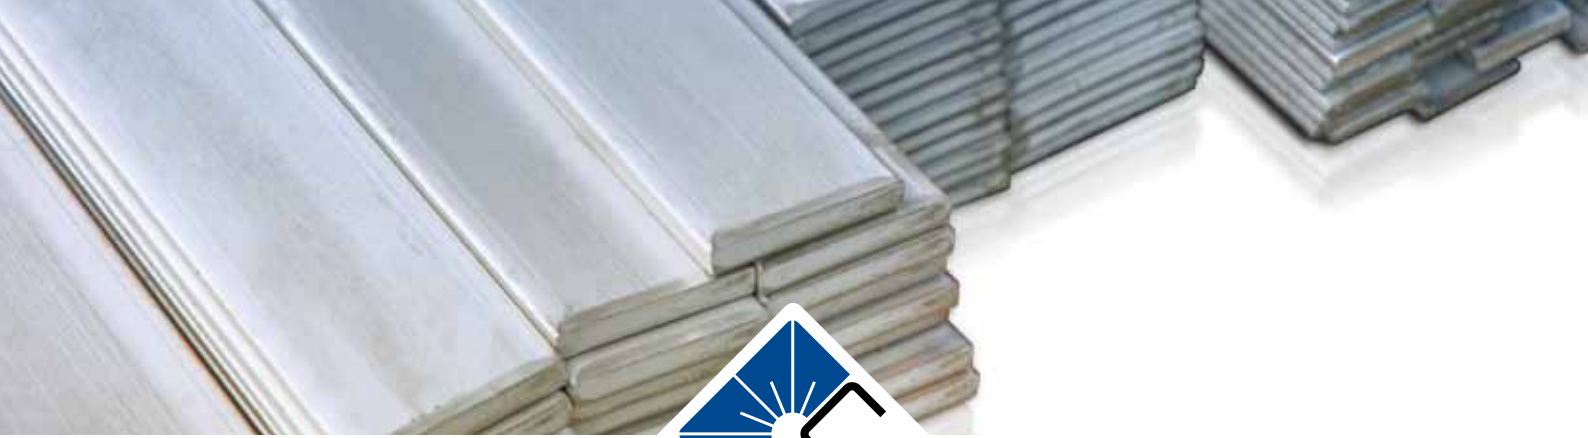


## Flat bar


Flat bar, hot rolled, annealed and pickled, respectively slitted.  
Tol Din1017

Width	Thickness	Length	Weight per m in kg
30	X 25	4	5,89
40	X 25	4	7,85
50	X 25	4	9,81
60	X 25	4	11,78
70	X 25	4	13,74
80	X 25	4	15,70
100	X 25	4	19,63
40	X 30	4	9,42
50	X 30	4	11,78
60	X 30	4	14,13
80	X 30	4	18,84
90	X 30	4	21,20
100	X 30	4	23,55
50	X 40	4	15,70
60	X 40	4	18,84
80	X 40	4	25,12
100	X 40	4	31,40

Dimensions in mm.

Standard stock comprises qualities 304(L) and 316L  
If required, we can grind the materials to quality K320

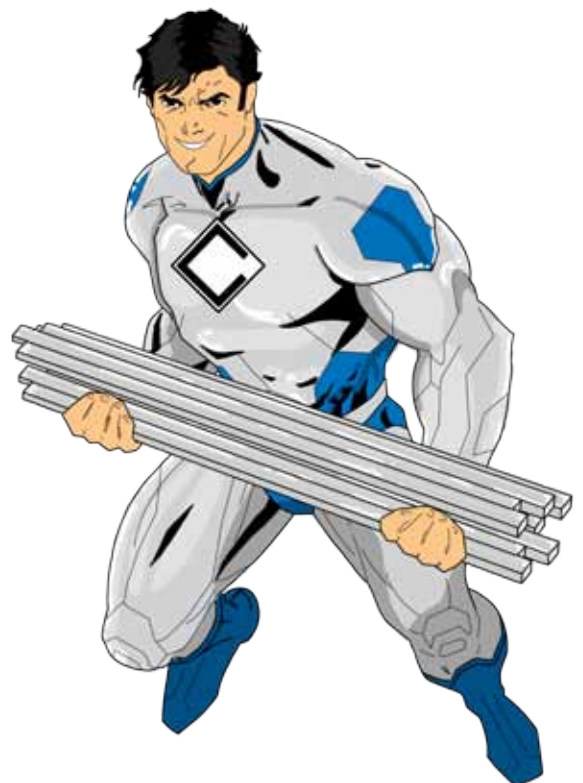

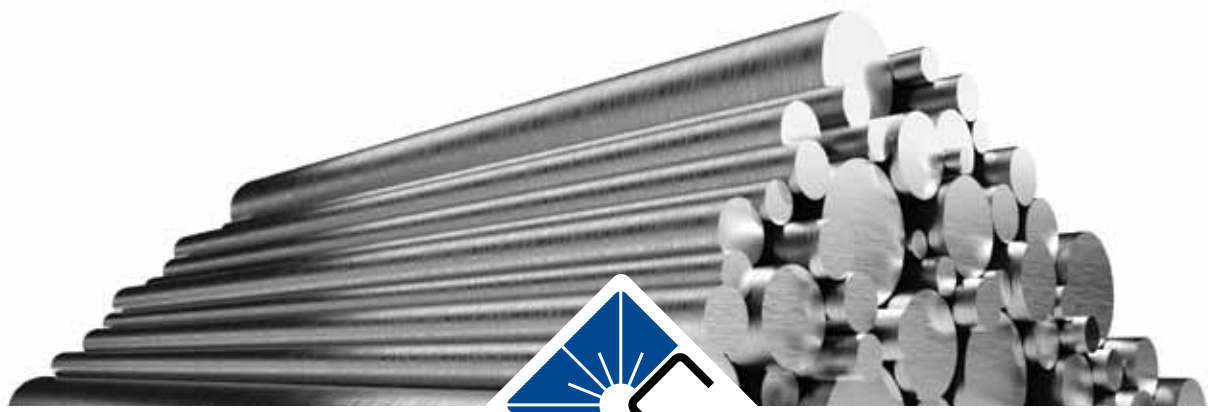


## Hot rolled round bar

Annealed and pickled  
Tol. DIN 1013 and length approx. 5.5 metres

Round (mm)	Length (m)	Weight per m in kg
30	5,5	11,10
40	5,5	14,80
50	5,5	18,50
60	5,5	22,19
65	5,5	26,05
70	5,5	30,21
75	5,5	34,68
80	5,5	39,46
85	5,5	44,55
90	5,5	49,94
95	5,5	55,64
100	5,5	61,65
105	5,5	67,97
110	5,5	74,60
115	5,5	81,49
120	5,5	88,78
125	5,5	96,28
130	5,5	104,20
140	5,5	120,84
150	5,5	138,72
160	5,5	157,83
170	5,5	178,18
180	5,5	199,76
190	5,5	222,60
200	5,5	246,62
220	5,5	298,40
230	5,5	326,30
250	5,5	385,30
280	5,5	483,40
300	5,5	554,90

Dimensions in mm.

Finish
303
304(L)
316L
316Ti, 321, 253 ma, always upon request

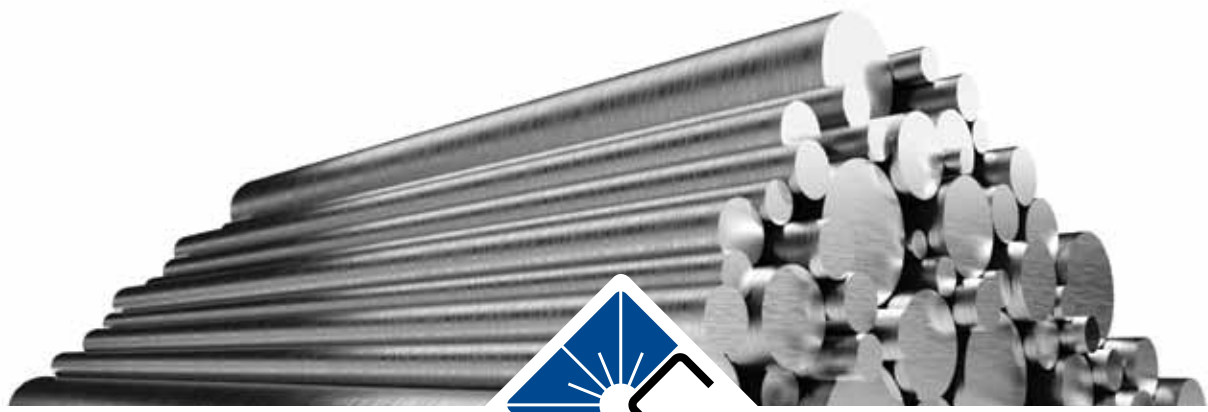

## Drawn round bar

Drawn, respectively ground  
Tol. h9 in length approx. 3 and/or 6 metres

Round (mm)	Length (m)	Weight per m in kg
3	3 - 6	0,06
4	3 - 6	0,10
5	3 - 6	0,15
6	3 - 6	0,22
7	3 - 6	0,30
8	3 - 6	0,39
10	3 - 6	0,62
11	3 - 6	0,75
12	3 - 6	0,89
13	3 - 6	1,04
14	3 - 6	1,21
15	3 - 6	1,39
16	3 - 6	1,58
17	3 - 6	1,78
18	3 - 6	2,00
19	3 - 6	2,23
20	3 - 6	2,47
22	3 - 6	2,98
24	3 - 6	3,55
25	3 - 6	3,85
30	3 - 6	5,55
32	3 - 6	6,31
35	3 - 6	7,55
40	3 - 6	9,87
45	3 - 6	12,50

Round (mm)	Length (m)	Weight per m in kg
30	3 - 6	5,55
32	3 - 6	6,31
35	3 - 6	7,55
40	3 - 6	9,87
45	3 - 6	12,50
50	3 - 6	15,40
55	3 - 6	18,65
60	3 - 6	22,20

Dimensions in mm.

If desired we grind the materials in quality K 320

Finish
h9
304(L)
316L
303



## Hot rolled square bar

Square (mm)	Length (m)	Weight per m in kg
10	3 - 4	0,78
12	3 - 4	1,13
15	3 - 4	1,76
16	3 - 4	2,01
20	3 - 4	3,14
25	3 - 4	4,90
30	3 - 4	7,06
35	3 - 4	9,61
40	3 - 4	12,56
50	3 - 4	19,62
60	3 - 4	28,26

Dimensions in mm.

Standard stock comprises qualities 303, 304(L) and 316L

Square hot rolled, annealed and pickled DIN 1014







## Drawn square bar


Square (mm)	Length (m)	Weight per m in kg
6	3 - 4	0,28
8	3 - 4	0,50
20	3 - 4	3,14
25	3 - 4	4,90
30	3 - 4	7,06
40	3 - 4	12,56
50	3 - 4	19,62

Dimensions in mm.

Standard stock comprises qualities 303, 304(L) and 316L

Square drawn stainless steel - material drawn DIN 178 (h11)



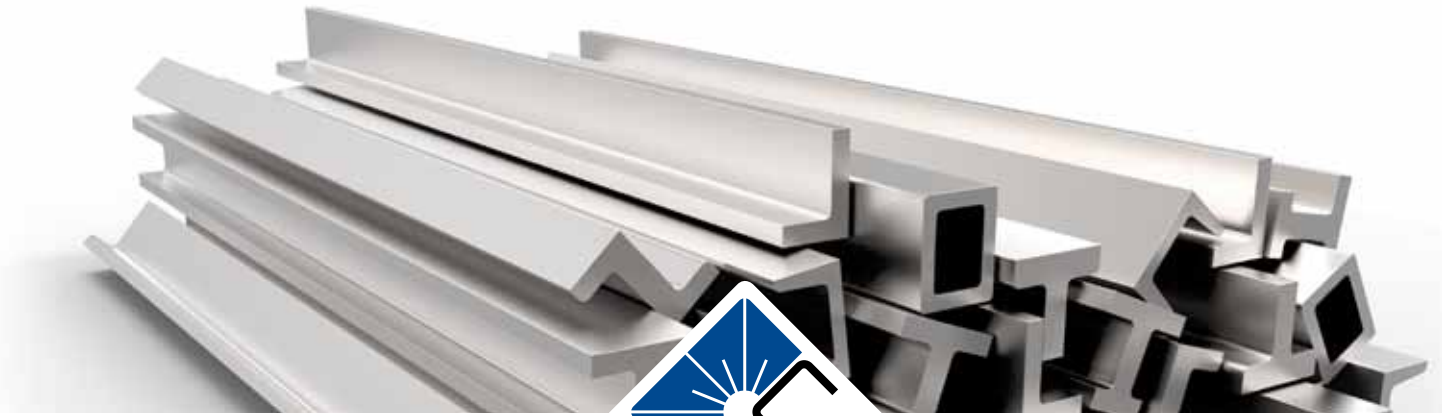

## Angle profile

Height		Width		Thickness	Length (m)	Weight per m in kg
20	X	20	X	3	6	0,88
25	X	25	X	3	6	1,12
30	X	30	X	3	6	1,36
35	X	35	X	4	6	1,78
40	X	40	X	4	6	2,42
50	X	50	X	5	6	3,77
60	X	60	X	6	6	5,42
70	X	70	X	7	6	7,38
80	X	80	X	8	6	9,66
100	X	100	X	10	6	15,10

Dimensions in mm.

Standard stock comprises qualities Quality 304(L) and 316L

Angle profile hot rolled, annealed and pickled DIN 1028





## Concrete reinforced bar / rebar

Thickness (mm)	Length (m)
8	6
10	6
12	6
16	6
20	6
25	6

Dimensions in mm.

We can supply 12 m lengths upon request

## Quality

AISI	W.Nr.
AISI 304	W.Nr. 1.4301
AISI 316L	W.Nr. 1.4404
LDX 2101	W.Nr. 1.4162
Duplex 2304	W.Nr. 1.4362